



Technical data

Connection: Thread acc. to DIN 2999

Diameters size: 1/4" up to 2"

Pressure range: PN65 up to PN30

Temperature range: -20°C up to +170°C
(depending from working pressure)

Materials:


- Body: brass nickel plated
- Ball: brass nickel plated
- Ball seals: PTFE
- Handle: steel zinc plated, yellow

Application: House- and sanitary technology, Plant factory for media: Water, Oils, Gases, Fuels, Compressed air etc.

Design features:

- Full bore • Stem seal with 2 O-rings
- Spring return
- ♦ Oil and grease free (optional)

☞ **More information on your inquiry!**

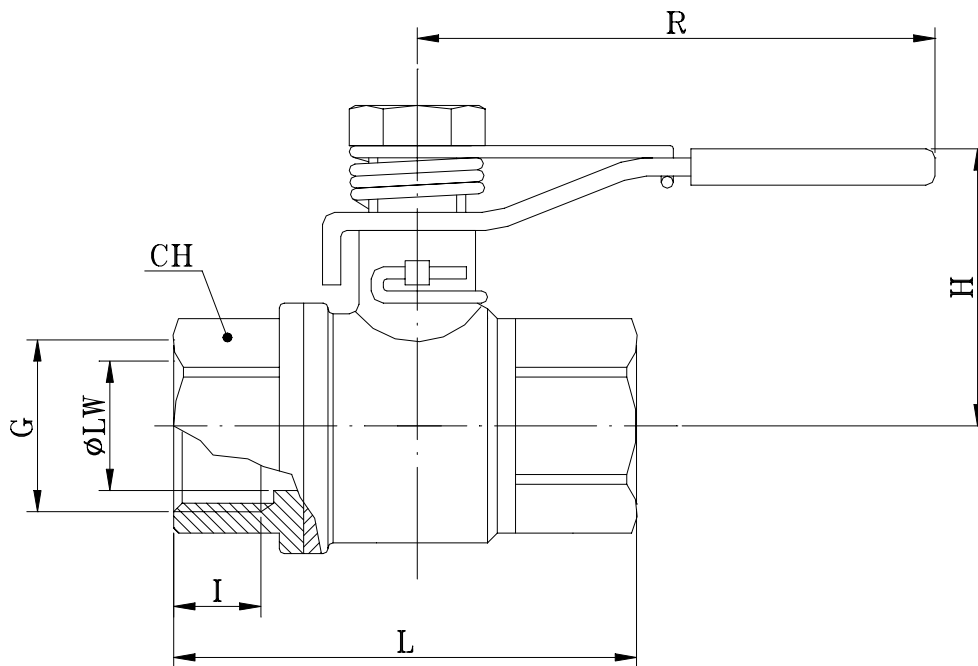

Dimensions in mm

G	-	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	-	-	-
øLW	-	8	10	15	20	25	32	40	50	-	-	-
L	-	50	60	75	80	90	110	120	140	-	-	-
H	-	40	40	43	51,5	55,5	75	81	88,5	-	-	-
R	-	82	82	100	120	120	158	158	158	-	-	-
I	-	12	12	15	17	19,5	22,5	24,5	24,5	-	-	-
CH	-	22	22	27	32	41	50	55	70	-	-	-
PN	-	65	65	65	40	40	30	30	30	-	-	-
Kg	-	0,22	0,22	0,34	0,50	0,77	1,23	1,63	2,58	-	-	-